

Part # IL-60W-0-10V-120


WIRING DIAGRAM

Schematics not to scale.

SECONDARY WIRING REQUIREMENTS



Part #5000UE

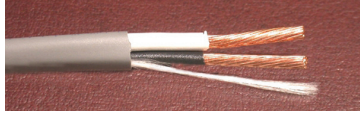

Security and Alarm Cable
Bare Copper Conductors, PVC Jacket
PVC Insulation
12AWG, 2 Conductors, Stranded (19*25)

Wire Gauge Maximum Lead Distance

16 gauge 15 feet (4.725 meters)

14 gauge 25 feet (7.62 meters)

12 gauge 40 feet (12.192 meters)

CAUTION

Incorrect polarity will cause damage voiding factory warranty.

ADVERTIR

La polaridad incorrecta causará daños garantía de fábrica de micción.




IL-60W-0-10V-120_WiringDiagrams_2016-10-26.pdf
© Innovative Lighting, Inc. All rights reserved.




Telephone 1 (972) 721-1177

RIGID BARS

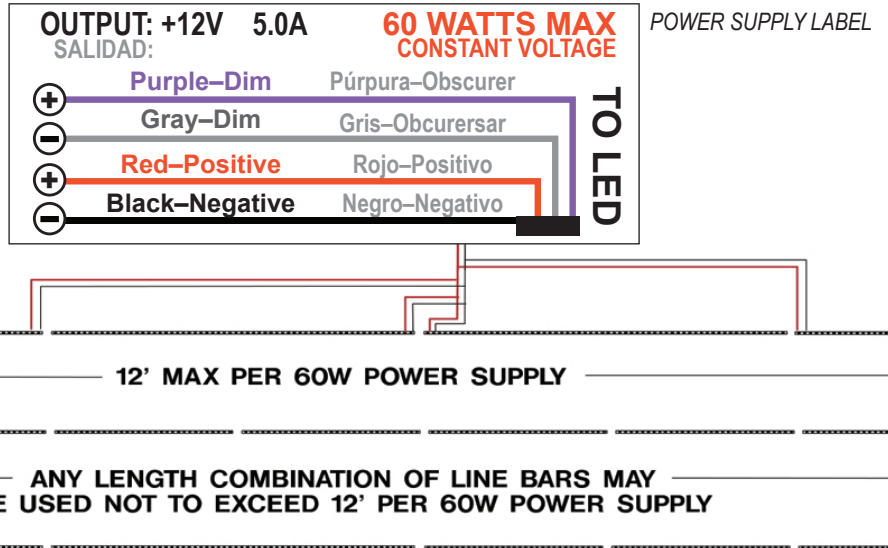

BLACK PODS

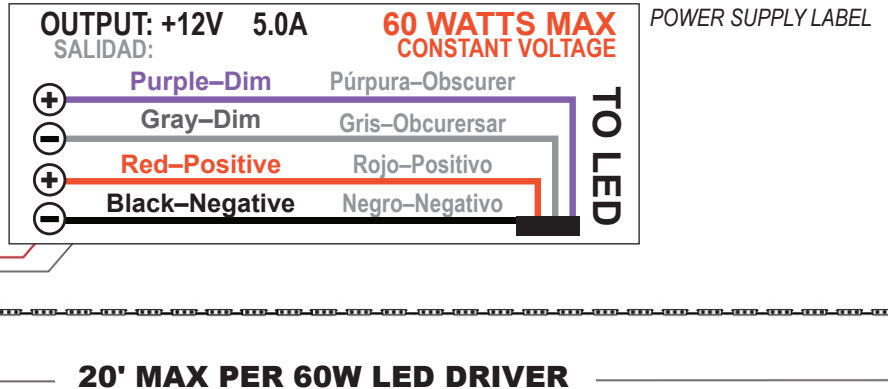

LINE IN

