


IL-POD-LWH-2.5-XXXXK-XX

LED Pods

White Diffuser Lens



**90 CRI
DIMS to 1%**

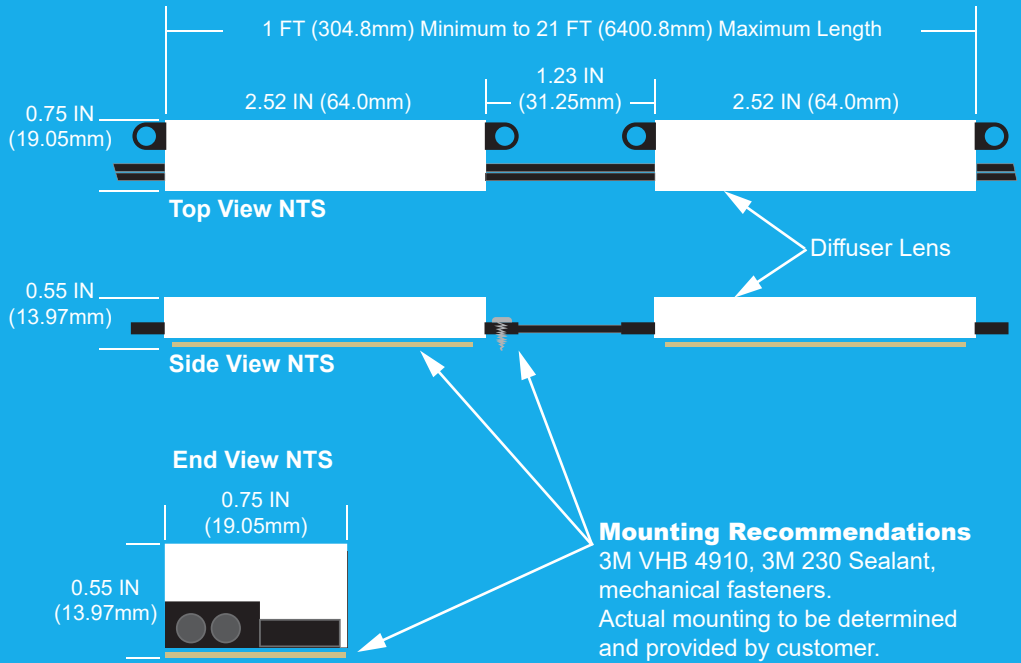

Secondary Wiring Requirements

Windy City Wire Part 007960 or equivalent. Maximum lead distance up to 100 FT from power supply to first LED fixture with Innovative Lighting, Inc Driver. Consult factory for longer leads.

Mounting Recommendations

3M VHB 4910, 3M 230 Sealant, mechanical fasteners. Actual mounting to be determined and provided by customer.

Product Features

Color Rendering Index: 90

Circuit Type: 12V or 24V DC Parallel

Maximum Power Consumption: 2.4975 Watts per foot (8.1918 per meter)

Beam Angle: 120°

Operating Temperature Range: -4°F to 122°F (-20°C to 50°C)

Dimming: Consistently to 1% with Innovative Lighting, Inc LED Drivers (See LED Driver Information Sheet)

Lens: Fire-Resistant Injection-Molded Acrylic White (Custom Colors Available)

Color Temperatures:

Lumen Output per FT:

Lumen Output per M:

IES File Number:

	2500K	3000K	3500K	4000K	Custom Color Temperatures Available
Lumen Output per FT:	216	295	326	357	
Lumen Output per M:	708.48	967.6	1069.28	1170.96	



IC Based Constant Current Regulator with Temperature Compensation Circuits, Lengths from 1.0 FT to 21.0 FT (304.8mm to 6400.8mm), Patent-Licenses LEDs, Total Quality-Controlled Manufacturing Process, Three-Stage Binning System, Suitable for Wet Locations - Use Only with Class 2 Power Unit, Suitable for Cove Lighting, Suitable for Installation in the Storage Area of Clothes Closet, Suitable for Cabinet or Under Cabinet Use



Telephone (972) 721-1177
Innovative-Lighting.com
2324 Hinton Drive, Irving, TX 75061

Published 2021-JUN 22