


SLIM LINE RIGID LED BAR WITH MOUNTING FLANGE

IL-WF-4.4-3000K



90 CRI DIMS to 1%

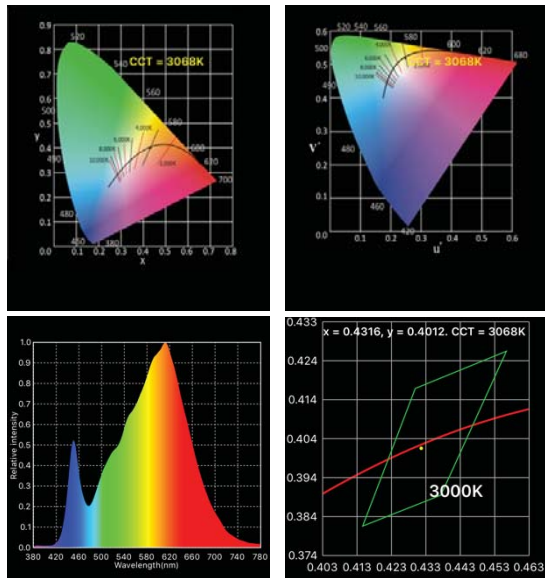

Parameter	Value
CCT	3068 K
Re(R1~R15)	81
CQS	86
Illuminance	4358 lux
Foot Candle	404.9 fc
CIE1931 x	0.4316
CIE1931 y	0.4012
CIE1976 u'	0.2483
CIE1976 v'	0.5195
λp	612 nm
λD	583 nm
Purity(Pe)	50 %
Duv	-0.0004
SP Ratio	1.4
PPFD(380-780nm)	65.79 μmol/m ² /s
TLCI(Qa)	75.5
GAI	57.0

PRODUCT SPECIFICATIONS

Color Rendering Index: 90

Lumen Output:
394 per Foot (1292.65 per Meter)

Circuit Type: Constant Voltage
12V - Can be cut every 2.00"
24V - Can be cut every 4.00"
Class 2 Power Unit Only

Input Voltage: Maximum 13.8V

Maximum Power Consumption:
4.44 Watts per Foot (14.4 per Meter)

Beam Angle: 120°

Maximum Surge Protection:
(For Short Periods) up to 18V

Operating Temperature Range:
-4°F to 122°F (-20°C to 50°C)

Dimming: Consistently to 1% with
Innovative Lighting, Inc LED Drivers
(See LED Driver Information Sheets)

Finish: Heat-Dissipating Aluminum
(Custom Colors Available)

Color Temperatures Available:

IL-WF-4.4-2700K

IL-WF-4.4-3000K - Chart on Left

IL-WF-4.4-3500K

IL-WF-4.4-4000K

IL-WF-4.4-5000K

IC Based Constant Current Regulator
with Temperature Compensation Circuits

Lengths from 6.0" to 96.0"
(152.4mm to 2438.4mm)

Patent-Licensed LEDs

Total Quality-Controlled
Manufacturing Process

Three-Stage Binning System


Suitable for Wet Locations.


Use Only with Class 2 Power Unit

Suitable for Cove Lighting

Suitable for Installation in the Storage
Area of Clothes Closet

Suitable for Cabinet or Under Cabinet Use

 No. ITL86304

 No. E469630

