


## SLIM LINE RIGID LED BAR

WITH MOUNTING FLANGE

### IL-WF-4.4-3000K



**90 CRI DIMS to 1%**

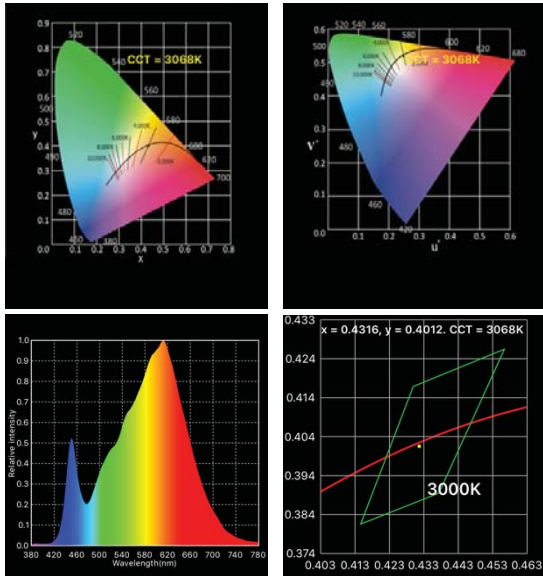

Parameter	Value
CCT	3068 K
Re(R1~R15)	81
CQS	86
Illuminance	4358 lux
Foot Candle	404.9 fc
CIE1931 x	0.4316
CIE1931 y	0.4012
CIE1976 u'	0.2483
CIE1976 v'	0.5195
λp	612 nm
λD	583 nm
Purity(Pe)	50 %
Duv	-0.0004
SP Ratio	1.4
PPFD(380-780nm)	65.79 μmol/m <sup>2</sup> /s
TLCI(Qa)	75.5
GAI	57.0

## PRODUCT SPECIFICATIONS

**Color Rendering Index:** 90  
**Lumen Output:**  
 394 per Foot (1292.65 per Meter)  
**Circuit Type:** Constant Voltage  
 12V - Can be cut every 2.00"  
 24V - Can be cut every 4.00"  
 Class 2 Power Unit Only  
**Input Voltage:** Maximum 13.8V  
**Maximum Power Consumption:**  
 4.44 Watts per Foot (14.4 per Meter)  
**Beam Angle:** 120°  
**Maximum Surge Protection:**  
 (For Short Periods) up to 18V  
**Operating Temperature Range:**  
 -4°F to 122°F (-20°C to 50°C)

**Dimming:** Consistently to 1% with Innovative Lighting, Inc LED Drivers (See LED Driver Information Sheets)

**Finish:** Heat-Dissipating Aluminum (Custom Colors Available)

**Color Temperatures Available:**  
 IL-WF-4.4-2700K  
**IL-WF-4.4-3000K - Chart on Left**  
 IL-WF-4.4-3500K  
 IL-WF-4.4-4000K  
 IL-WF-4.4-5000K

IC Based Constant Current Regulator with Temperature Compensation Circuits  
 Lengths from 6.0" to 96.0" (152.4mm to 2438.4mm)  
 Patent-Licensed LEDs  
 Total Quality-Controlled Manufacturing Process  
 Three-Stage Binning System  
 Suitable for Wet Locations.  
 Use Only with Class 2 Power Unit  
 Suitable for Cove Lighting  
 Suitable for Installation in the Storage Area of Clothes Closet  
 Suitable for Cabinet or Under Cabinet Use

