

## WALL WASHER WITH MOUNTING FLANGE AND LOW PROFILE DIFFUSER LENS

## Part # IL-ACL00W-120/60 ND PRODUCT SPECIFICATIONS

120V/60Hz

Lumen Output: 860 per Foot

Maximum Power Consumption:  
10.0 Watts Per Foot

Beam Angle: 120°

Non-Yellowing Acrylic Lens

Aluminum Housing with  
Adjustable Mounting Feet

2-Year Warranty

All Parts Are Serviceable and Stock in the USA

### 10W Available Fixture Lengths:

12" Part No. IL-ACL10W-120/60-ND-12IN

24" Part No. IL-ACL10W-120/60-ND-24IN

48" Part No. IL-ACL10W-120/60-ND-48IN

### 15W Available Fixture Lengths:

12" Part No. IL-ACL15W-120/60-ND-12IN

24" Part No. IL-ACL15W-120/60-ND-24IN

48" Part No. IL-ACL15W-120/60-ND-48IN

### Power Cord SOOW

Heavy-Duty Industrial Application

Service Cord (600 Volts)

Oil Resistant both inside insulation and  
outside jacket


Sunlight Resistant

Length: 72" (Longer Lengths Available)


### Optional Wall Mounting

Custom Pivot Bracket Direct

Available Bracket Lengths: 2", 6", 12", 18", 24"

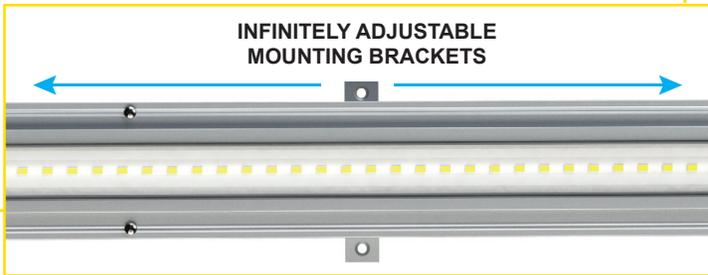

#6 Screw Mounting

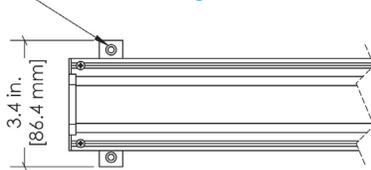

Sliding Mounting Brackets

