

Submitted by:		Date:
Job Name:		
Type:	Total Footage:	Color Temp:
Voltage 120/277:	Dim/Non-Dim:	

Part # IL-ACL00W-120/60-ND

WALL WASHER

WITH MOUNTING FLANGE & LOW PROFILE
DIFFUSER LENS

PRODUCT SPECIFICATIONS

120V/60Hz
Lumen Output: 860 per Foot
Maximum Power Consumption: 10.0 Watts Per Foot
Beam Angle: 120°
Non-Yellowing Acrylic Lens
Aluminum Housing with Adjustable Mounting Feet
2-Year Warranty

All Parts Are Serviceable and Stock in the USA

10W Available Fixture Lengths:

12" Part No. IL-ACL10W-120/60-ND-12IN
24" Part No. IL-ACL10W-120/60-ND-24IN
48" Part No. IL-ACL10W-120/60-ND-48IN

15W Available Fixture Lengths:

12" Part No. IL-ACL15W-120/60-ND-12IN
24" Part No. IL-ACL15W-120/60-ND-24IN
48" Part No. IL-ACL15W-120/60-ND-48IN


Power Cord SOOW

Heavy-Duty Industrial Application
Service Cord (600 Volts)
Oil Resistant both inside insulation & outside jacket
Sunlight Resistant
Length: 72" (Longer Lengths Available)





Optional Wall Mounting

Custom Pivot Bracket Direct
Available Bracket Lengths: 2", 6", 12", 18", 24"

#6 Screw Mounting

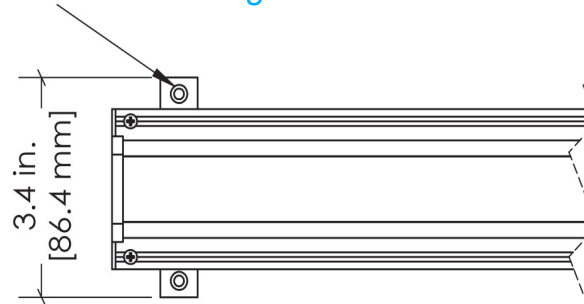

Sliding Mounting Brackets

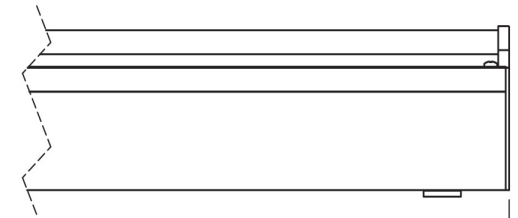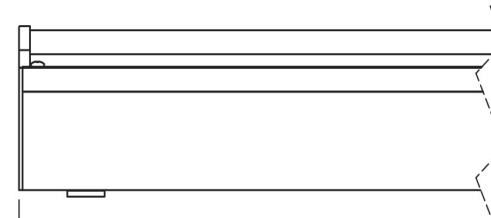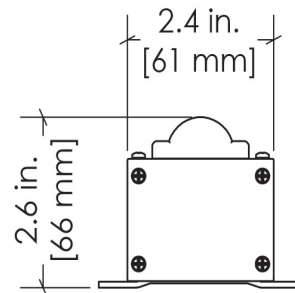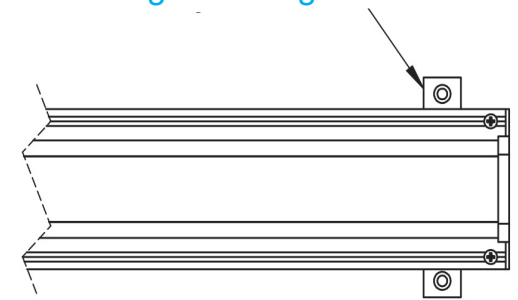

12" [305 mm] Minimum to 96" [2438.4 mm] Maximum
Available in 12" [305 mm] increments