
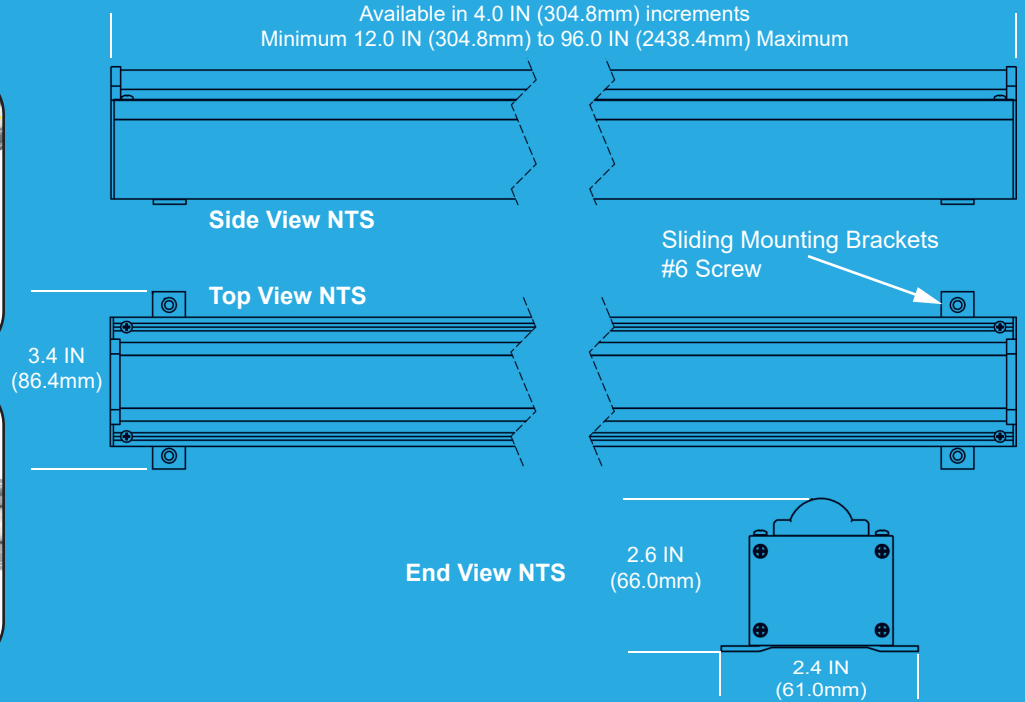
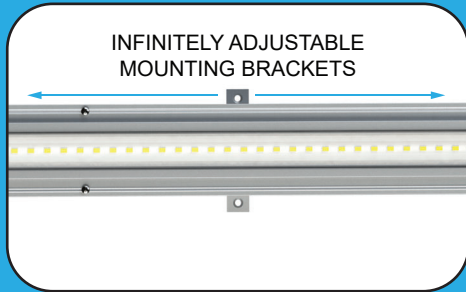


IL-ACL-5.0-XXXXK-24-120/60-ND

Wall Washer

Mounting Flange, Diffuser Lens

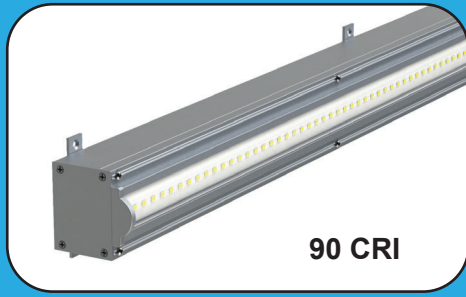

Product Features

Warranty: Two (2) Years. All Parts Serviceable and Stocked in the USA

Driver: Integral, 24V, 120/60-ND

Circuit Type: 24V, Constant Voltage, Class 2 Power Unit Only

Maximum Power Consumption: 5.0 Watts per foot

Beam Angle: 120°

Operating Temperature Range: -4°F to 122°F (-20°C to 50°C)

Dimming: Non-Dimming (Dimming option available)

Housing: Heat-Dissipating Aluminum, Adjustable Mounting Feet

Lens: Fire-Resistant Extruded Non-Yellowing Acrylic

Color Temperatures:

Lumen Output per FT:

Lumen Output per M:

IES File Number:

	3000K	3500K	4000K	5000K	Custom Color Temperatures Available
Lumen Output per FT:	301	335.7	373	428.9	
Lumen Output per M:	987.28	1101.096	1223.75	1406.792	
IES File Number:			ITL90957		



Optional Power Cord SOOW: Heavy-duty Industrial Application, Service Cord, Oil-Resistant Inside Insulation and Outside Jacket, Sunlight Resistant, Length 72.0 IN. **Optional Wall Mounting:** Custom Pivot Bracket Direct in Length Increments of 2.0 IN, 6.0 IN, 12.0 IN, 18.0 IN, 24.0 IN



Telephone (972) 721-1177
 Innovative-Lighting.com
 2324 Hinton Drive, Irving, TX 75061

Published 2020-OCT 26