
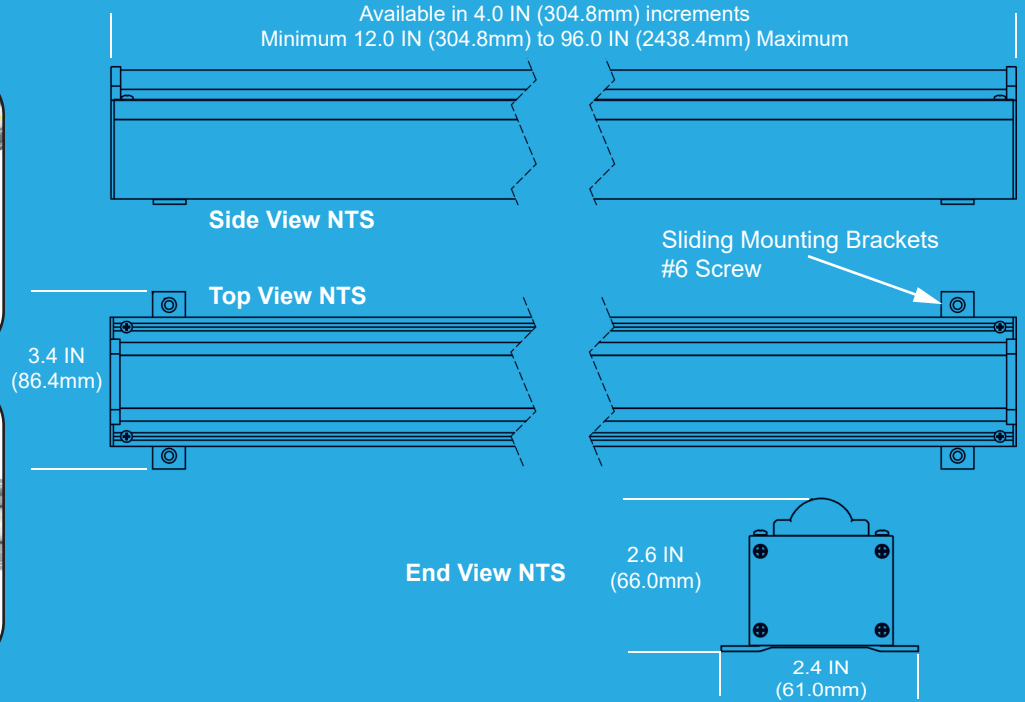
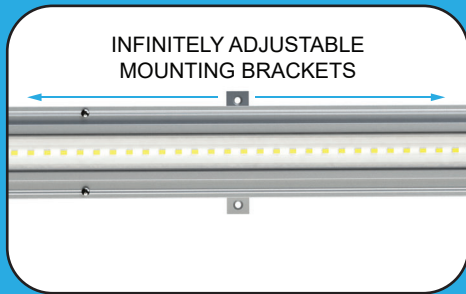


IL-ACL-HO-15.0-XXXXK-24-120-277/96-ND

High Output Wall Washer
Mounting Flange, Diffuser Lens

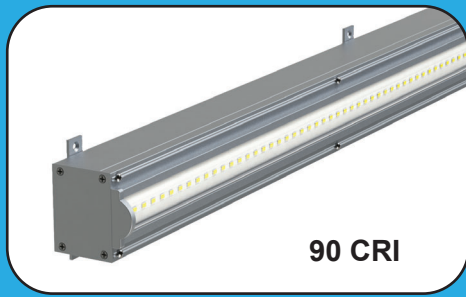

Product Features

Warranty: Two (2) Years. All Parts Serviceable and Stocked in the USA

Driver: Integral, 24V, 120-277/96-ND

Circuit Type: 24V, Constant Voltage, Class 2 Power Unit Only

Maximum Power Consumption: 15.0 Watts per foot

Beam Angle: 120°

Operating Temperature Range: -4°F to 122°F (-20°C to 50°C)

Dimming: Non-Dimming (Dimming Option Available)

Housing: Heat-Dissipating Aluminum, Adjustable Mounting Feet

Lens: Fire-Resistant Extruded Non-Yellowing Acrylic

Color Temperatures:

Lumen Output per FT:

Lumen Output per M:

IES File Number:

3000K

3500K

4000K

5000K

537
1761.36

597
1958.16

665
2181.75

744
2440.32

ITL90959



Custom
Color Temperatures
Available

Optional Power Cord SOOW: Heavy-duty Industrial Application, Service Cord, Oil-Resistant Inside Insulation and Outside Jacket, Sunlight Resistant, Length 72.0 IN. **Optional Wall Mounting:** Custom Pivot Bracket Direct in Length Increments of 2.0 IN, 6.0 IN, 12.0 IN, 18.0 IN, 24.0 IN



Telephone (972) 721-1177
Innovative-Lighting.com
2324 Hinton Drive, Irving, TX 75061

Published 2020-OCT 26