
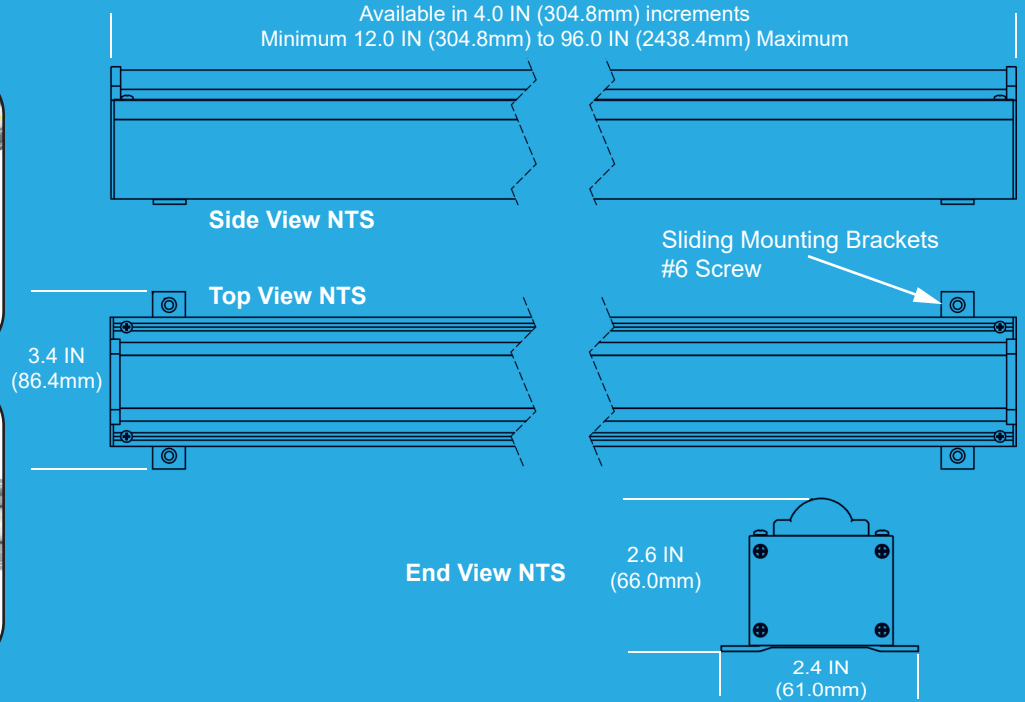
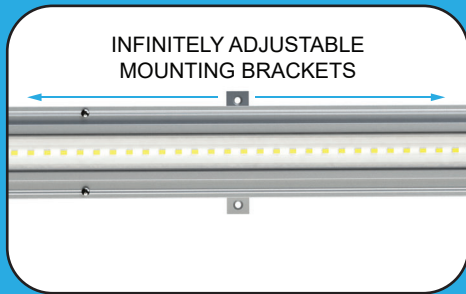


IL-ACL-HO-15-XXXXK-24

High Output Wall Washer
Mounting Flange, Diffuser Lens

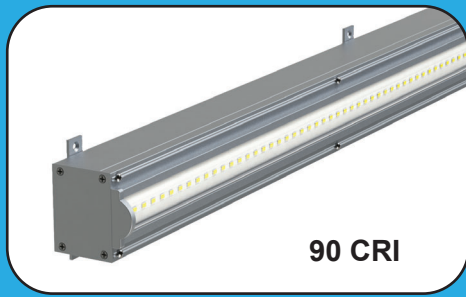

Product Features

Warranty: Two (2) Years. All Parts Serviceable and Stocked in the USA

Driver: Remote, 24V

Circuit Type: 24V, Constant Voltage, Class 2 Power Unit Only

Maximum Power Consumption: 15 Watts per foot

Beam Angle: 120°

Operating Temperature Range: -4°F to 122°F (-20°C to 50°C)

Dimming: Consistently to 1% with Innovative Lighting, Inc LED Drivers (See LED Driver Information Sheet)

Housing: Heat-Dissipating Aluminum, Adjustable Mounting Feet

Lens: Fire-Resistant Extruded Non-Yellowing Acrylic

Color Temperatures:	3000K	3500K	4000K	5000K	Custom Color Temperatures Available
Lumen Output per FT:	537	597	665	744	
Lumen Output per M:	1761.36	1958.16	2181.75	2440.32	
IES File Number:	ITL90959				

Optional Power Cord SOOW: Heavy-duty Industrial Application, Service Cord, Oil-Resistant Inside Insulation and Outside Jacket, Sunlight Resistant, Length 72.0 IN. **Optional Wall Mounting:** Custom Pivot Bracket Direct in Length Increments of 2.0 IN, 6.0 IN, 12.0 IN, 18.0 IN, 24.0 IN



Telephone (972) 721-1177
Innovative-Lighting.com
2324 Hinton Drive, Irving, TX 75061

Published 2020-JAN 10