



# IL-ACL-HO-7.5-XXXXK-24-120-277/60-ND

High Output Wall Washer  
Mounting Flange, Diffuser Lens

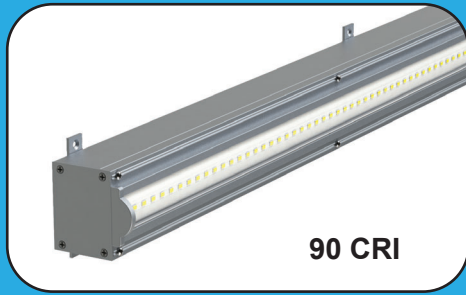


90 CRI

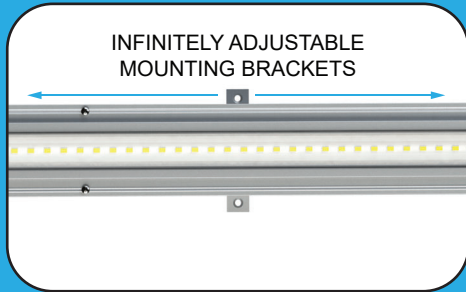


INFINITELY ADJUSTABLE  
MOUNTING BRACKETS


Available in 4.0 IN (304.8mm) increments  
Minimum 12.0 IN (304.8mm) to 96.0 IN (2438.4mm) Maximum

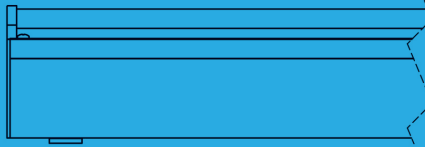

Side View NTS

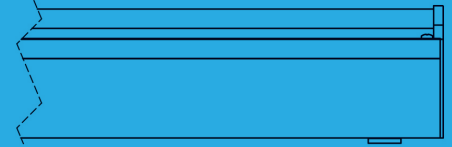


Sliding Mounting Brackets  
#6 Screw

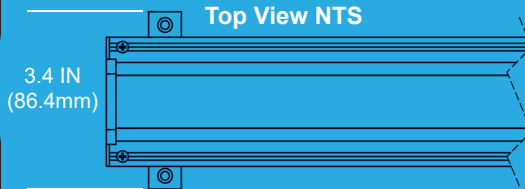


Top View NTS

3.4 IN  
(86.4mm)

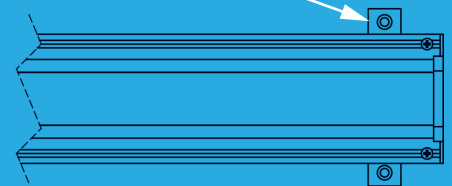

End View NTS

2.6 IN  
(66.0mm)



2.4 IN  
(61.0mm)

## Product Features

**Warranty:** Two (2) Years. All Parts Serviceable and Stocked in the USA

**Driver:** Intergral, 24V, 120-277/60-ND

**Circuit Type:** 24V, Constant Voltage, Class 2 Power Unit Only

**Maximum Power Consumption:** 7.5 Watts per foot

**Beam Angle:** 120°

**Operating Temperature Range:** -4°F to 122°F (-20°C to 50°C)

**Dimming:** Non-Dimming (Dimming Option Available)

**Housing:** Heat-Dissipating Aluminum, Adjustable Mounting Feet

**Lens:** Fire-Resistant Extruded Non-Yellowing Acrylic



**Color Temperatures:**

	3000K	3500K	4000K	5000K
<b>Lumen Output per FT:</b>	298.8	332.5	369.5	417.53
Lumen Output per M:	980.064	1090.6	1212.27	1369.49
<b>IES File Number:</b>			ITL90958	

**Lumen Output per FT:**

298.8      332.5      369.5      417.53

Lumen Output per M:

980.064      1090.6      1212.27      1369.49

**IES File Number:**

ITL90958

Custom  
Color Temperatures  
Available

**Optional Power Cord SOOW:** Heavy-duty Industrial Application, Service Cord, Oil-Resistant Inside Insulation and Outside Jacket, Sunlight Resistant, Length 72.0 IN. **Optional Wall Mounting:** Custom Pivot Bracket Direct in Length Increments of 2.0 IN, 6.0 IN, 12.0 IN, 18.0 IN, 24.0 IN



Telephone (972) 721-1177  
Innovative-Lighting.com  
2324 Hinton Drive, Irving, TX 75061

Published 2020-OCT 26