


# IL-ACL-HO-7.5-XXXXK-24-120/60-ND

High Output Wall Washer  
Mounting Flange, Diffuser Lens

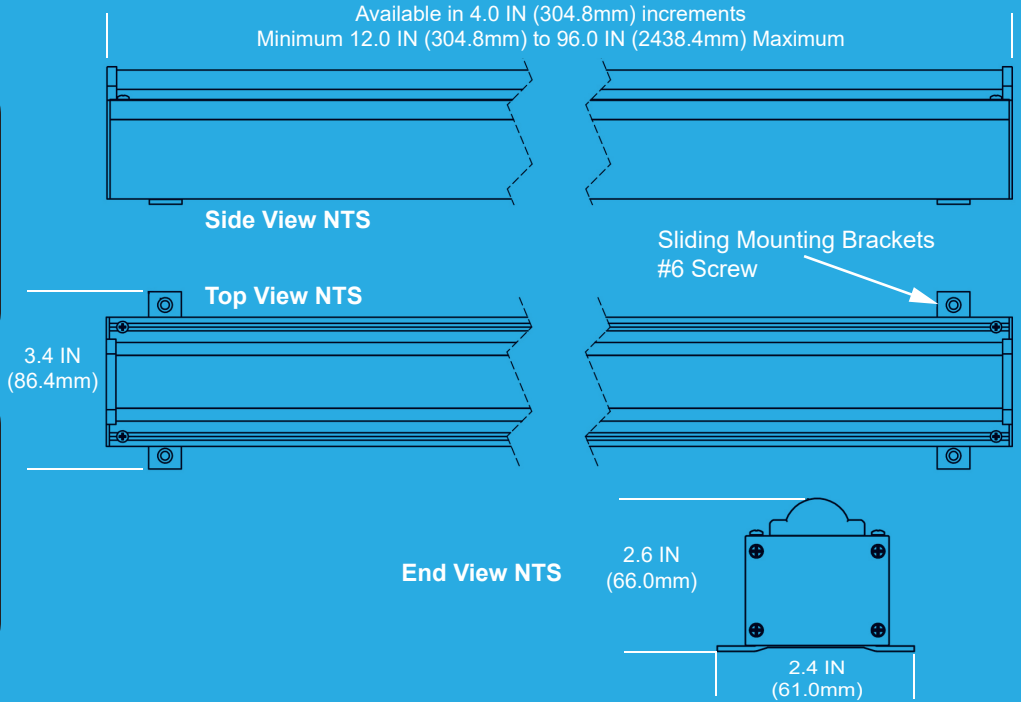

## Product Features

**Warranty:** Two (2) Years. All Parts Serviceable and Stocked in the USA

**Driver:** Intergral, 24V, 120/60-ND

**Circuit Type:** 24V, Constant Voltage, Class 2 Power Unit Only

**Maximum Power Consumption:** 7.5 Watts per foot

**Beam Angle:** 120°

**Operating Temperature Range:** -4°F to 122°F (-20°C to 50°C)

**Dimming:** Non-Dimming (Dimming Option Available)

**Housing:** Heat-Dissipating Aluminum, Adjustable Mounting Feet

**Lens:** Fire-Resistant Extruded Non-Yellowing Acrylic

<b>Color Temperatures:</b>	<b>3000K</b>	<b>3500K</b>	<b>4000K</b>	<b>5000K</b>
<b>Lumen Output per FT:</b>	298.8	332.5	369.5	417.53
Lumen Output per M:	980.064	1090.6	1212.27	1369.49
<b>IES File Number:</b>			ITL90958	



Custom  
Color Temperatures  
Available

**Optional Power Cord SOOW:** Heavy-duty Industrial Application, Service Cord, Oil-Resistant Inside Insulation and Outside Jacket, Sunlight Resistant, Length 72.0 IN. **Optional Wall Mounting:** Custom Pivot Bracket Direct in Length Increments of 2.0 IN, 6.0 IN, 12.0 IN, 18.0 IN, 24.0 IN



Telephone (972) 721-1177  
Innovative-Lighting.com  
2324 Hinton Drive, Irving, TX 75061

Published 2020-OCT 26