



IL-ACL-HO-7.5-XXXXK-24

High Output Wall Washer
Mounting Flange, Diffuser Lens

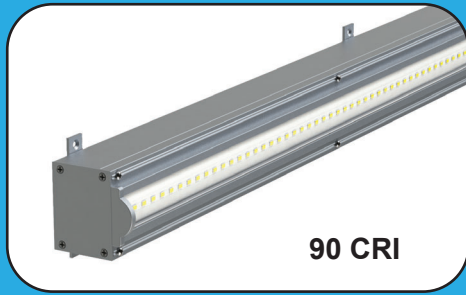


90 CRI

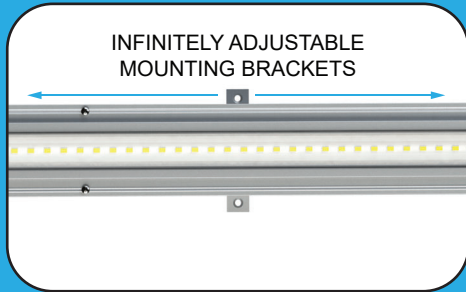


INFINITELY ADJUSTABLE
MOUNTING BRACKETS


Available in 4.0 IN (304.8mm) increments
Minimum 12.0 IN (304.8mm) to 96.0 IN (2438.4mm) Maximum

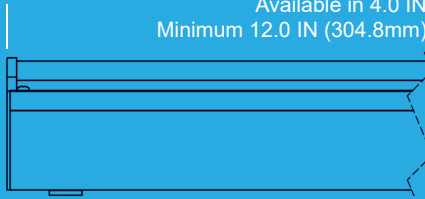


Side View NTS

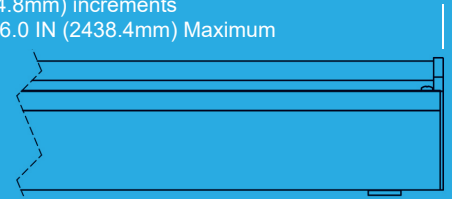

Sliding Mounting Brackets
#6 Screw

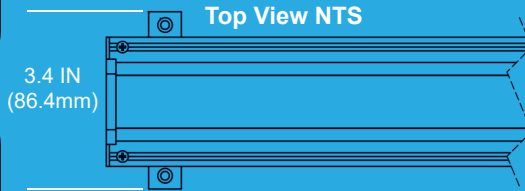


Top View NTS

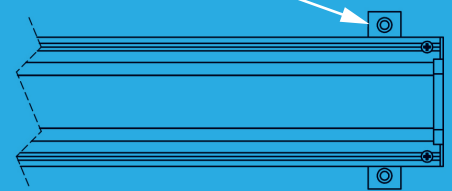

End View NTS

2.6 IN
(66.0mm)



2.4 IN
(61.0mm)

Product Features

Warranty: Two (2) Years. All Parts Serviceable and Stocked in the USA

Driver: Remote, 24V

Circuit Type: 24V, Constant Voltage, Class 2 Power Unit Only

Maximum Power Consumption: 7.5 Watts per foot

Beam Angle: 120°

Operating Temperature Range: -4°F to 122°F (-20°C to 50°C)

Dimming: Non-Dimming (Dimming Option Available)

Housing: Heat-Dissipating Aluminum, Adjustable Mounting Feet

Lens: Fire-Resistant Extruded Non-Yellowing Acrylic



Color Temperatures:

3000K	3500K	4000K	5000K
--------------	--------------	--------------	--------------

Lumen Output per FT:

298.8	332.5	369.5	417.53
-------	-------	-------	--------

Lumen Output per M:

980.064	1090.6	1212.27	1369.49
---------	--------	---------	---------

IES File Number:

ITL90958

Custom
Color Temperatures
Available

Optional Power Cord SOOW: Heavy-duty Industrial Application, Service Cord, Oil-Resistant Inside Insulation and Outside Jacket, Sunlight Resistant, Length 72.0 IN. **Optional Wall Mounting:** Custom Pivot Bracket Direct in Length Increments of 2.0 IN, 6.0 IN, 12.0 IN, 18.0 IN, 24.0 IN



Telephone (972) 721-1177
Innovative-Lighting.com
2324 Hinton Drive, Irving, TX 75061

Published 2020-OCT 26