
IL-DV-X.X-XXXK-24-1.5

Direct View LED Custom Exterior Fixture with 1.50 IN Diffuser Tube



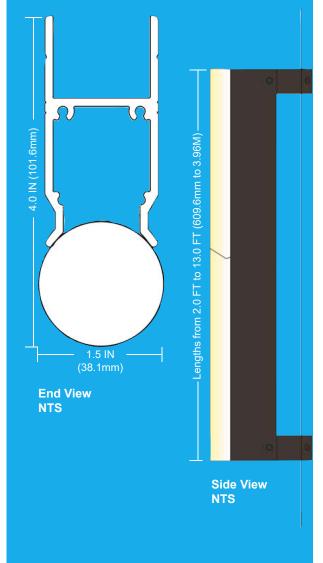

Product Features

Circuit Type: 24V DC Parallel

Input Voltage: Maximum 24V

Maximum Power Consumption: Static White: 4.4 Watts per foot (14.4 per meter) RGBW: 8.7 Watts per foot (28.54 per meter)

Beam Angle: 300°

Operating Temperature Range: -4°F to 122°F (-20°C to 50°C)

Color Options: Whites, Static Colors, RGBW

<u>Color Temperatures</u>: 2700K 3000K 3500K 4000K 5000K RGBW <u>Finish</u>: Heat-Dissipating Aluminum (Custom Colors Available)

Lens: Acrylic, 1.50 IN Diameter

Fixture Length: 2.0 FT to 13.0 FT (609.6mm to 3.96M)

Driver Options: Remote, Programmable DMX for RGB

Custom LED Exterior Fixture

Linear LED Fixture best suited for long runs. Ideal location use: architectural, retail, and entertainment. Diffuser tube enables uniform illumination while allowing optimal viewing angles. Extruding aluminum channel provides resistance to shock and vibration.





Telephone (972) 721-1177 Innovative–Lighting.com 2324 Hinton Drive, Irving, TX 75061

Published 2020-OCT 26

IL-DV-X.X-XXXXK-24-1.5_CutSheet.pdf © Innovative Lighting, Inc.