


# IL-LNF-4.4-XXXXK-12


Slim Line Rigid LED Bar  
Low Profile Diffuser Lens

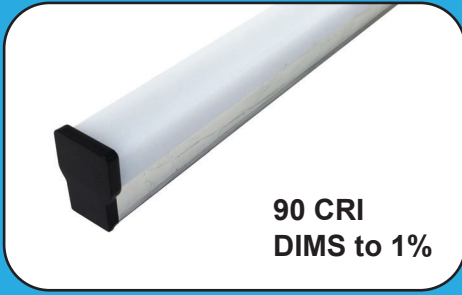

90 CRI  
DIMS to 1%

## Secondary Wiring Requirements

Windy City Wire Part 007960 or equivalent. Maximum lead distance up to 100 FT from power supply to first LED fixture with Innovative Lighting, Inc Driver. Consult factory for longer leads.

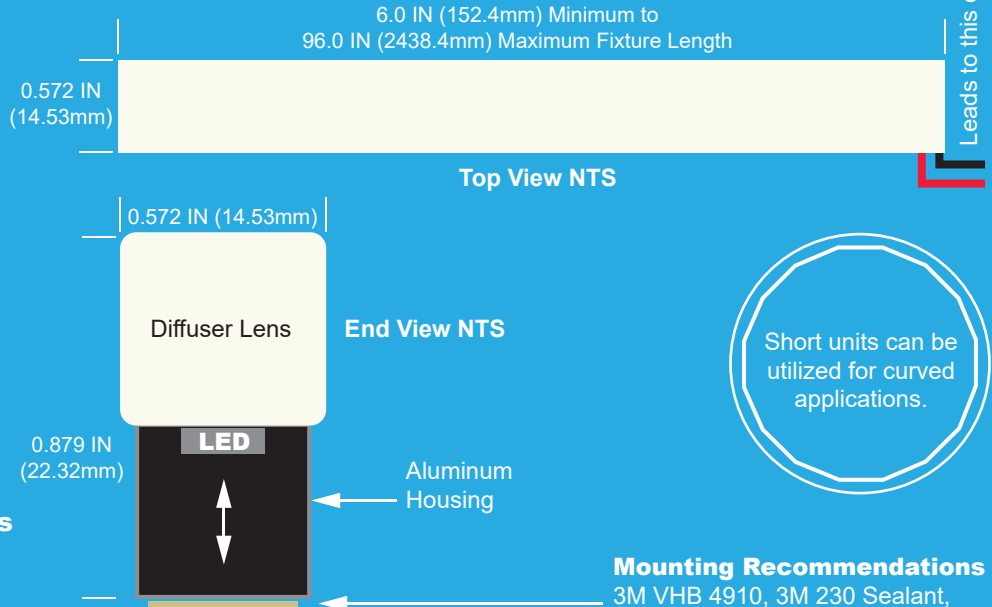

## Mounting Recommendations

3M VHB 4910, 3M 230 Sealant, mechanical fasteners. Actual mounting to be determined and provided by customer.

## Product Features

**Color Rendering Index:** 90

**Circuit Type:** Constant Voltage, Class 2 Power Unit Only  
12V - Cutable at 2.0 IN increments (0, 2, 4, 6...)

**Maximum Power Consumption:** 4.4 Watts per foot (14.4 per meter)

**Beam Angle:** 120°

**Operating Temperature Range:** -4°F to 122°F (-20°C to 50°C)

**Dimming:** Consistently to 1% with Innovative Lighting, Inc LED Drivers (See LED Driver Information Sheet)

**Finish:** Heat-Dissipating Aluminum (Custom Colors Available)

**Lens:** Fire-Resistant Extruded Acrylic (Custom Colors Available)

**Color Temperatures:**

**Lumen Output per FT:**  
Lumen Output per M:

	2700K	3000K	3500K	4000K
Lumen Output per FT:	196.2	218	246.3	278.3
Lumen Output per M:	643.536	715.22	807.86	912.82
<b>IES File Number:</b>		ITL86305		



Custom  
Color Temperatures  
Available

IC Based Constant Current Regulator with Temperature Compensation Circuits, Lengths from 6.0 IN to 96.0 IN (152.4mm to 2438.4mm), Patent-Licensed LEDs, Total Quality-Controlled Manufacturing Process, Three-Stage Binning System, Suitable for Wet Locations - Use Only with Class 2 Power Unit, Suitable for Cove Lighting, Suitable for Installation in the Storage Area of Clothes Closet, Suitable for Cabinet or Under Cabinet Use



Telephone (972) 721-1177  
Innovative-Lighting.com  
2324 Hinton Drive, Irving, TX 75061

Published 2020-SEP 30