
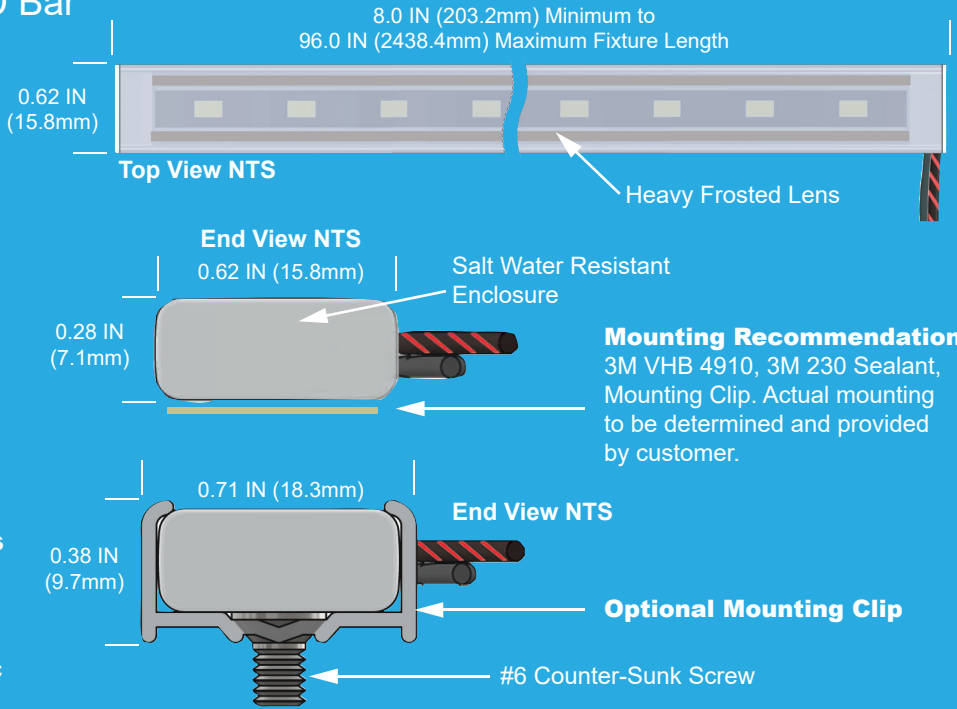


SLE-L-4.4-XXXXK-24

Slim Line Encapsulated LED Bar
with or without Mounting Clips

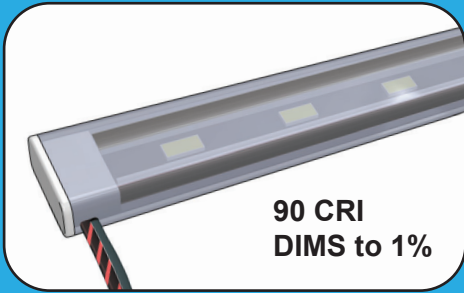

Secondary Wiring Requirements

Windy City Wire Part 007960 or equivalent. Maximum lead distance up to 100 FT from power supply to first LED fixture with Innovative Lighting, Inc Driver. Consult factory for longer leads.

Product Features

Color Rendering Index: 90

Circuit Type: Constant Voltage, Class 2 Power Unit Only
24V - Cutable at 4.0 IN increments (0, 4, 8, 12...)

Maximum Power Consumption: 4.44 Watts per foot (14.4 per meter)

Beam Angle: 120°

Operating Temperature Range: -4°F to 122°F (-20°C to 50°C)

Dimming: Consistently to 1% with Innovative Lighting, Inc LED Drivers (See LED Driver Information Sheet)

Encapsulation Material: Heat and Flame-Resistant Polycarbonate

Lens Color: Heavy Frosted

Color Temperatures:

Lumen Output per FT:
Lumen Output per M:

IES File Number:

	2700K	3000K	3500K	4000K	
	317	310	319	328	Custom Color Temperatures Available
	1040.0	1017.0	1046.58	1075.84	
	ITL92108	ITL92109	ITL92110		

IC Based Constant Current Regulator with Temperature Compensation Circuits, Lengths from 8.0 IN to 96.0 IN (203.2mm to 2438.4mm), Patent-Licensed LEDs, Total Quality-Controlled Manufacturing Process, Three-Stage Binning System, Suitable for Wet Locations - Use Only with Class 2 Power Unit, Suitable for Cove Lighting, Suitable for Cabinet or Under Cabinet Use



INNOVATIVE
Lighting
DALLAS

Telephone (972) 721-1177
Innovative-Lighting.com
2324 Hinton Drive, Irving, TX 75061

Published 2021-NOV 09